

**6"****CX6F140**

# Coaxial Ferrite-Neodymium Driver



## Key features:

- LF AND HF COMBINED MAGNETIC CIRCUIT
- COMPACT, BUT POWERFUL SPEAKER
- MAGNETIC CIRCUIT COMBINING FERRITE AND NEODYMIUM MAGNETS

## Design notes:

The CX6F-140F is a high efficiency, (95dB 1watt / 1 meter) 6.5-inch coaxial speaker with very linear frequency response characteristics and high power handling capability. The mid-woofer utilizes REDCATT developed paper pulp cone that has proven its performance in many our successful designs. The HF section was designed around our most successful dome assembly as used in 140FCD. The mini waveguide is CNC machined from single piece of alumi-

num, given the whole assembly incredible precision. The combination of used materials with our state of the art quality production yields in well performing driver even in the most demanding extreme conditions.

Magnetic circuit design REDCATT engineers have developed ferrite-neodymium based magnetic circuit, capable of delivering the highest level of performance in a small form factor. The

combination of ferrite and neodymium delivers an excellent magnetic performance. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Aluminum demodulation ring is assembled in the HF section.

## Specifications:

### General specs (LF/HF)

Nominal Diameter: 6"  
Rated Impedance: 8 ohm

### Power handling (LF/HF)

AES Power: 100/30 watts  
Program Power: 200/60 watts  
Peak Power: 400/120 watts

### Voice Coil (LF/HF)

Diameter: 1.75/1.4 in.  
Winding wire: CCAR  
Former: Glass Fiber/  
Winding height: 10/2.5 mm

### T/S Parameters (LF/HF)

Resonant frequency: 121/1000 Hz  
Re: 5.4/5.5 ohm  
Qes: 0.52  
Qms: 4.73  
Qts: 0.47  
Vas: 4.4 liters  
Sd: 141 cm<sup>2</sup>  
Sensitivity: 95.5 dB  
Mms: 10.9 grams  
Bl: 9.27  
Le: 0.45 mH

### Design details (LF/HF)

Surround Material: Fabric/Poly-  
Cone/ dome material: Paper/Polymer  
Spider: Nomex/n/a  
Plate thickness: 6 mm  
Peak to peak linear cone displacement: 4.1 mm  
Overall diameter: 165.2 mm  
Bolt circle diameter: 157.5 mm  
Baffle cutout dia.: 144 mm  
Number of mounting holes: 8  
Depth (flange to rear): 85.8 mm  
Net weight: 2.1kg


### Ordering codes:

CX6F140X8-361C

### Recone kits:

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

## Frequency response & Impedance

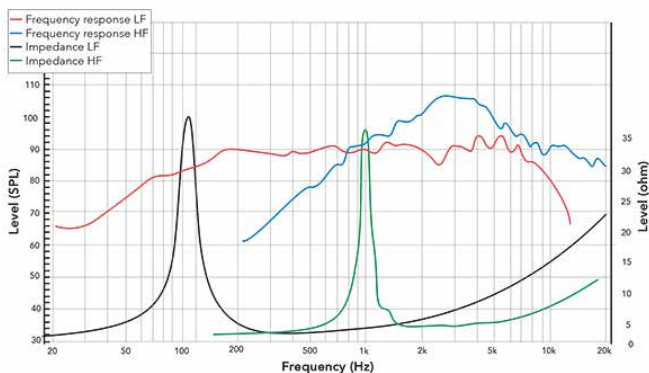

Frequency response measured on IAC baffle

## 2D drawing

